







PR 125-25

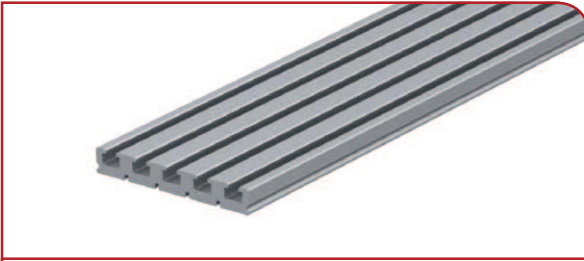

Weight	4.07 kg/m	Moment of inertia I _x	4.28 cm ⁴
Part no. 6 m	201091 6000	Moment of inertia I _y	198.03 cm ⁴
		Moment of resistance W _x	4.19 cm ³
		Moment of resistance W _y	31.68 cm ³

- Aluminium, naturally anodised
- 5 T-slot inserts for slot nuts
- 4 hollow inserts for M5/M6 screws
- Standard length: 6000 mm



PR 250-25

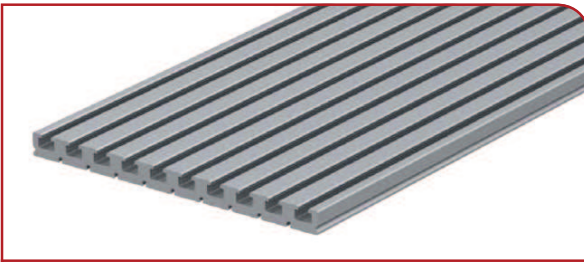

Weight	8.14 kg/m	Moment of inertia I _x	8.55 cm ⁴
Part no. 6 m	201092 6000	Moment of inertia I _y	1573.62 cm ⁴
		Moment of resistance W _x	8.38 cm ³
		Moment of resistance W _y	125.89 cm ³

- Aluminium, naturally anodised
- 10 T-slot inserts for slot nuts
- 9 hollow inserts for M4 screws
- Standard length: 6000 mm



PR 375-25

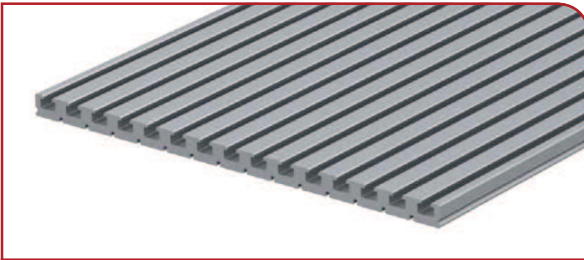

Weight	12.21 kg/m	Moment of inertia I _x	12.81 cm ⁴
Part no. 6 m	201093 6000	Moment of inertia I _y	5304.73 cm ⁴
		Moment of resistance W _x	12.57 cm ³
		Moment of resistance W _y	282.92 cm ³

- Aluminium, naturally anodised
- 15 T-slot inserts for slot nuts
- 14 hollow inserts for M5/M6 screws
- Standard length: 6000 mm

PR 500-25

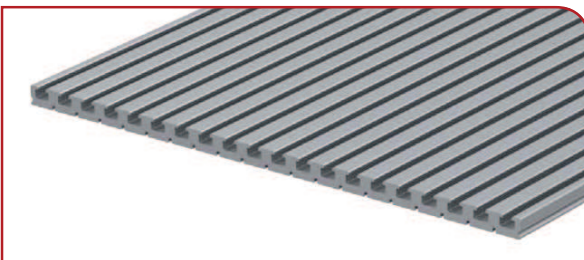


Weight	17.08 kg/m	Moment of inertia I _x	17.08 cm ⁴
Part no. 6 m	201093 6000	Moment of inertia I _y	12569.34 cm ⁴
		Moment of resistance W _x	16.77 cm ³
		Moment of resistance W _y	502.77 cm ³


- Aluminium, naturally anodised
- 20 T-slot inserts for slot nuts
- 19 hollow inserts for M4 screws
- Standard length: 6000 mm



T-SLOT NUT 1

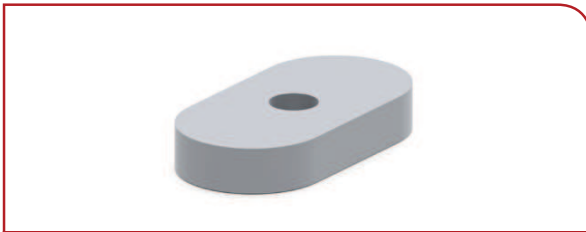

Thread	Height [mm]	Packaging unit [PU]	Part number/PU
M4	3	20	209001 0030
M5	4	20	209001 0021
M6	5	20	209001 0032
M8	6	20	209001 0034

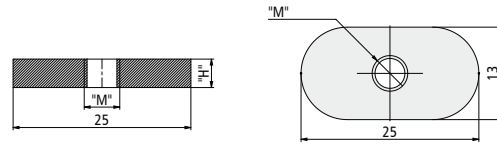


- T-slot nut for aluminium T-slot
- Clamp and expander fixing
- Material galvanised steel
- Thread M4, M5, M6 and M8

T-SLOT NUT 2




Thread	Height [mm]	Packaging unit [PU]	Part number/PU
M4	3	20	209001 0017
M5	4	20	209001 0022
M6	5	20	209001 0031
M8	6	20	209001 0033

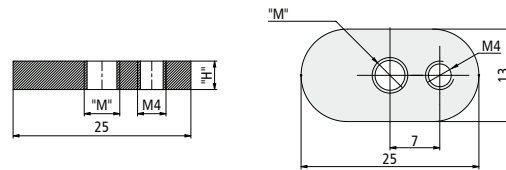


- T-slot nut for aluminium T-slot
- Clamp and expander fixing
- Material galvanised steel
- Thread M4, M5, M6, M8 and fixing M4 (incl. grub screw)

T-SLOT NUT 4

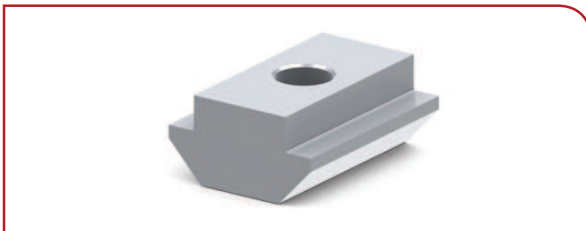


Thread	Packaging unit [PU]	Part number/PU
M5	20	209001 0055
M6	20	209001 0056
M8	20	209001 0057
M6 (stainless)	20	209001 0058




- T-slot nut for aluminium T-slot
- Clamp and expander fixing
- Thread M5, M6 and M8 (galvanised steel)
- Thread M6 stainless

T-SLOT NUT 6

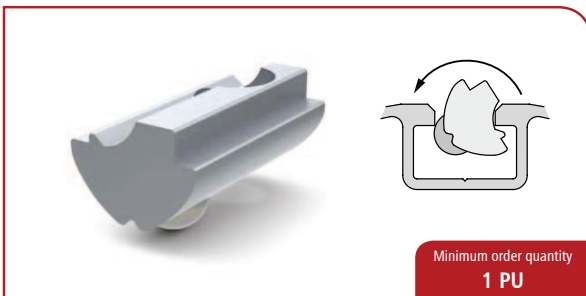

Minimum order quantity
1 PU


Thread	Packaging unit [PU]	Part number/unit
M6	100 units	209001 0015
M8	100 units	209001 0018

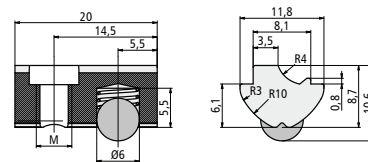

- T-slot nut with pressure ball for aluminium T-slot
- Slot nut can be retroactively tilted
- Material galvanised steel
- Thread M6 or M8





T-SLOT NUT 7

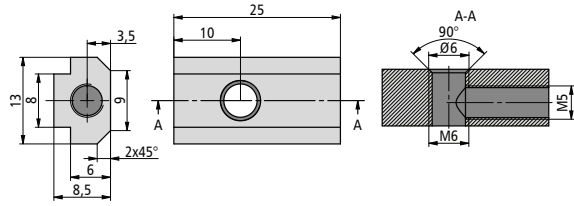

- T-slot nut galvanised steel
- Thread M6 and M5 at the front
- For angle fixing in the T-slot
- Can be slid into T-slot

Thread	Packaging unit [PU]	Part number/unit
M6	100 units	209001 0268


T-SLOT NUT 8

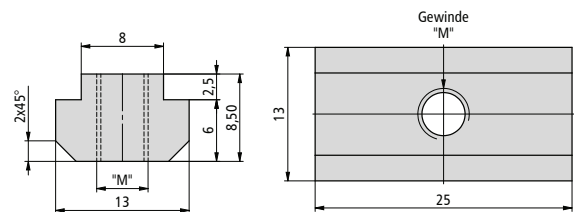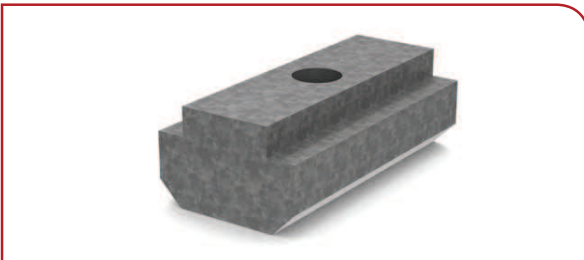

- T-slot nut long galvanised steel
- Thread M4, M5, M6
- For clamp and expander fixing
- Can be slid into T-slot

Thread	Packaging unit [PU]	Part number/PU
M4	20 units	209001 0023
M5		209001 0024
M6		209001 0025



T-SLOT NUT 9

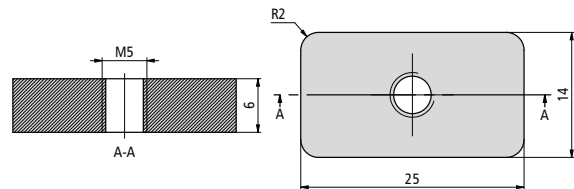

- T-slot nut galvanised steel
- Rectangular shape with M5 thread
- For clamp and expander fixing
- Can be slid into T-slot

Thread	Packaging unit [PU]	Part number/PU
M5	10 units	209001 0287

T-SLOT NUT 10

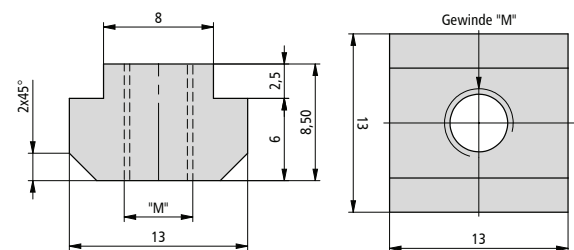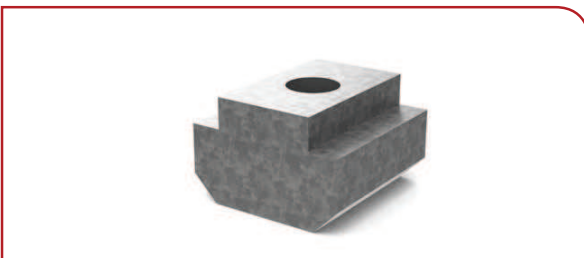

- T-slot nut short galvanised steel
- Thread M4, M5, M6
- For clamp and expander fixing
- Can be slid into T-slot

Thread	Packaging unit [PU]	Part number/PU
M4	20 units	209001 0026
M5		209001 0027
M6		209001 0028